




Product Description

The EXR is a sleek, architecturally design emergency exit sign suitable for ceiling recessing. Its unobtrusive design makes it suitable for areas where aesthetics are of high importance. The low profile of the EXR makes it perfect for areas with low ceilings. Installation is fast and simple. The EXR is available in a wide variety of finishes including anodised aluminium or any RAL finish specified, making it the perfect choice for all types of interior projects.

Product Features

- Super compact design.
- Aluminium construction.
- 8mm acrylic panel.
- RAL 9016 as standard - Can be powder coated any colour in the RAL spectrum.
- Also available with anodised finish in a variety of colours.
- Recessed ceiling mounting.
- Easy installation.
- High output LED module.
- Viewing distance - 26 metres (as per I.S.3217:2013+A1:2017)
- Full DALI / Self-Test / Non-DALI options available.
- Fully compliant to I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ErP, the RoHS, the WEEE and the Battery European Directives.

Product Image

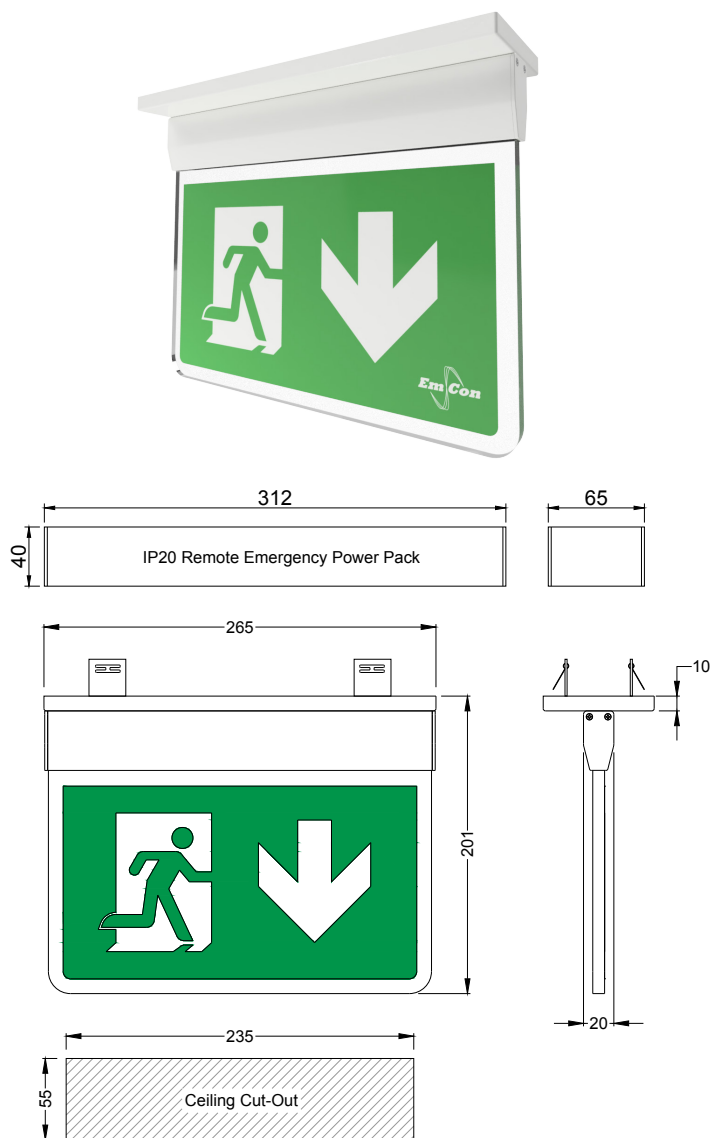

Product Specifications

Order Code	EXR/BASIC	EXR/SELFTST	EXR/DALI
Mode of Operation	Maintained	Maintained	Maintained
Supply Voltage	230V AC 50/60Hz	230V AC 50/60Hz	230V AC 50/60Hz
Light Source	TRIDONIC 1W High Output 6500K LED Strip	TRIDONIC 1W High Output 6500K LED Strip	TRIDONIC 1W High Output 6500K LED Strip
Battery	TRIDONIC 3.6V 2Ah 3-Cell NiMh	TRIDONIC 3.6V 2Ah 3-Cell NiMh	TRIDONIC 3.6V 2Ah 3-Cell NiMh
Emergency Inverter	TRIDONIC EMpowerLED 1W BASIC	TRIDONIC EMpowerLED 1W SELFTST	TRIDONIC EMpowerLED 1W PRO
Re-charge Period	24 hours from full discharge	24 hours from full discharge	24 hours from full discharge
Emergency Duration	3 hours	3 hours	3 hours
Status Indicator	Green LED	Bi-colour green/red LED	Bi-colour green/red LED
Test Facility	Manual testing via Central Test Unit, results documented manually	Automatic testing, results documented manually	Testing and documentation of results via DALI system
Viewing Distance	26 metres	26 metres	26 metres
Ingress Protection	IP20	IP20	IP20
Finish	White (Other available on request)	White (Other available on request)	White (Other available on request)

Example codes: EXR/DALI/7024 = EXR, DALI Option, RAL 7024 Finish
EXR/9016 = EXR, Non-DALI Option, RAL 9016 Finish