

## Product Description

- 1W LED emergency adjustable spotlight
- LiFePO4 battery technology
- 4000K as standard (3000K option available)
- Wide beam as standard (narrow beam option available)
- Surface mounting installation
- Stainless Steel 316L body
- Powder coated metal remote pack


## Product Image



## Specification

- 3 hour rated duration
- Powered via remote pack
- Non-maintained operation as standard (maintained option available)
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- Recessed Mounting available
- 45° vertical adjustment, 360° horizontal adjustment LED spotlight
- IP65 ingress protection
- Stainless Steel 316L as standard
- Custom RAL colour available on request

## Product Dimensions

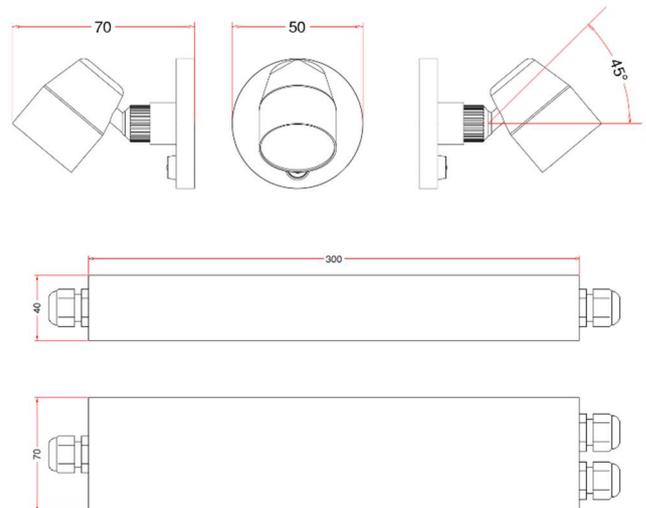

### **Technical Data**

Mode of Operation	Non-Maintained (Maintained option available)
Supply Voltage	230VAC 50/60Hz
Light Source	1W High Output 4000K LED (3000K option available)
Battery	TRIDONIC 3.2V 3.0Ah 2-Cell LiFePO4
Emergency Inverter	TRIDONIC EM powerLED FX LiFePO4 1 – 2 W
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit (Self-Test & DALI options also available)
Ingress Protection	IP65
Finish	Stainless steel 316L as standard (other colours available on request)
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives