

## Product Description

- 2W LED emergency IP65 surface bulkhead
- Can be used externally
- LiFePO4 battery technology
- Surface mounting installation
- Polycarbonate housing
- Clear polycarbonate diffuser


## Product Image



## Specification

- 3 hour rated duration
- Non-maintained operation (maintained option available)
- Luminous flux of 260 lm
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- Surface ceiling mounting
- RAL 9003 White as standard
- Custom RAL colour available on request

## Product Dimensions

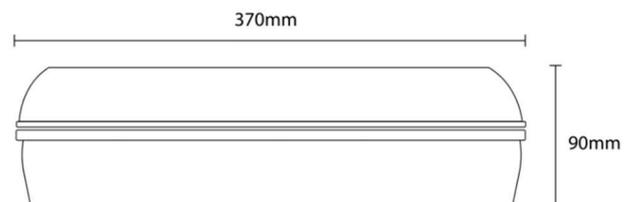

### **Technical Data**

|                    |  |
|--------------------|--|
| Mode of Operation  | Non-Maintained (Maintained option available)   |
| Supply Voltage     | 230VAC 50/60Hz   |
| Light Source       | TRIDONIC 2W High Output 6500K LED Strip  |
| Battery            | TRIDONIC 3.2V 4.5Ah 3-Cell LiFePO4   |
| Emergency Inverter | TRIDONIC EM powerLED FX LiFePO4 1 – 2 W  |
| Luminous Flux      | 260 lm   |
| Re-Charge Period   | 24 hours from full discharge   |
| Emergency Duration | 3 hours  |
| Test Facility      | Central Test Unit (Self-Test & DALI options also available)  |
| Ingress Protection | IP65   |
| Finish             | RAL 9003 as standard (other colours available on request)  |
| Compliance         | I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives |