

Product Description

- 18W LED emergency circular die-cast bulkhead c/w eyelid
- LiFePO4 battery technology
- Surface mounting installation
- Polycarbonate opal diffuser
- IK10 die-cast aluminium housing



Product Image



Specification

- 3 hour rated duration
- Switch maintained operation
- High output 18W Tridonic LED module
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- Surface ceiling/wall mounting
- IP65 ingress protection
- 9005 as standard
- Custom RAL colour available on request
- Available without asymmetric eyelid

Product Dimensions

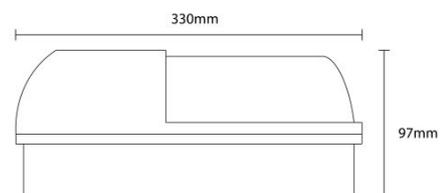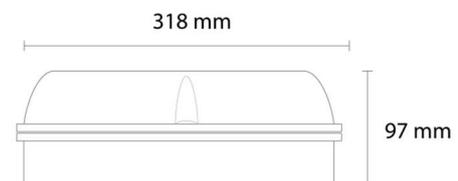

Technical Data

Mode of Operation	Switch Maintained
Supply Voltage	230VAC 50/60Hz
Light Source	18W TRIDONIC 4000K LED CRI>80
Battery	TRIDONIC 3.2V 4.5Ah 3-Cell LiFePO4
Emergency Inverter	TRIDONIC EM powerLED FX 102 SC LiFePO4 32W 50V
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit (Self-Test & DALI options also available)
Ingress Protection	IP65
Finish	9005 as standard (other colours available on request)
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives