

**Product Description**

- 1W LED emergency exit sign
- LiFePO4 battery technology
- Surface mounting installation
- Acrylic clear pictogram
- Powder coated die-cast aluminium housing


**Product Image**



**Specification**

- 3 hour rated duration
- 26 metre viewing distance
- Maintained operation
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- Surface wall mounting
- IP20 ingress protection
- RAL 9003 White as standard
- Custom RAL colour available on request

**Product Dimensions**

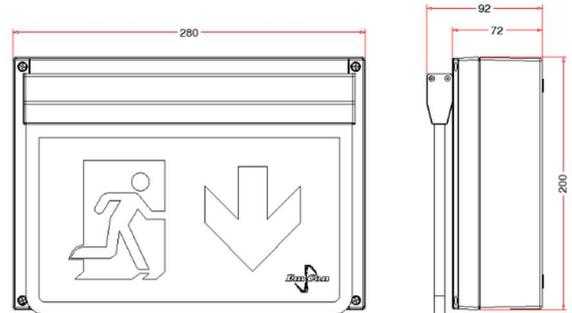

**Technical Data**

Mode of Operation	Maintained
Supply Voltage	230VAC 50/60Hz
Light Source	TRIDONIC 1W High Output 6500K LED Strip
Battery	TRIDONIC 3.2V 3.0Ah 2-Cell LiFePO4
Emergency Inverter	TRIDONIC EM powerLED FX LiFePO4 1 – 2 W
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit ( Self-Test & DALI options also available)
Viewing Distance	26 Metres
Ingress Protection	IP20
Finish	RAL 9003 as standard (other colours available on request)
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives