

## Product Description

- 2x8W Led emergency twinspace
- LiFePO4 battery technology
- High output 4000K floodlights
- Surface mounting installation
- Powder coated metal housing


## Product Image



## Specification

- 3 hour rated duration
- Non-maintained operation
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- 2no. adjustable floodlights
- 270° vertical adjustment, 360° horizontal adjustment LED floodlight
- Surface wall mounting
- IP20 ingress protection
- RAL 9003 White as standard
- Custom RAL colour available on request

## Product Dimensions

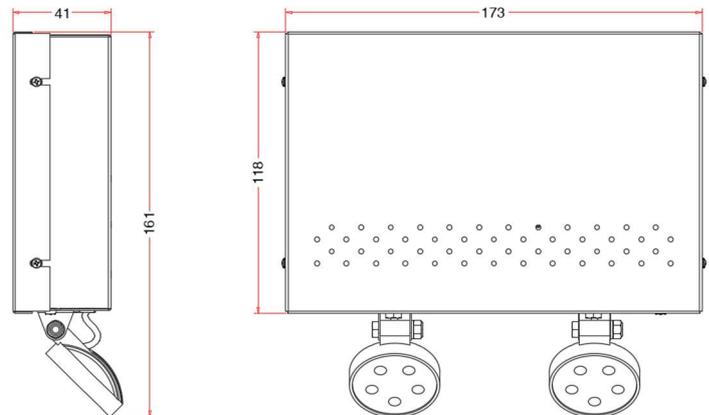

### **Technical Data**

Mode of Operation	Non-Maintained
Supply Voltage	230VAC 50/60Hz
Light Source	8W High Output 4000K LED
Battery	YUASA 12V. 9.0Ah Lead Acid
Emergency Inverter	Emcon 12VDC Emergency Inverter
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit (Self-Test & DALI options also available)
Ingress Protection	IP20
Finish	RAL 9003 as standard (other colours available on request)
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives

