

Product Description

- 2x8 Watt LED emergency twinspace
- LiFePO4 battery technology
- Surface mounting installation
- High output 6000K LED floodlights
- Polycarbonate Housing


Product Image



Specification

- 3 hour rated duration
- Non-maintained operation
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- 2no. adjustable floodlights
- 270° vertical adjustment, 360° horizontal adjustment LED floodlight
- Surface wall mounting
- IP65 ingress protection
- Grey polycarbonate finish

Product Dimensions

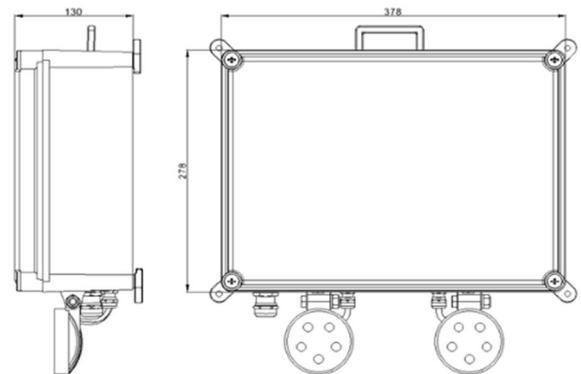

Technical Data

Mode of Operation	Non-maintained
Supply Voltage	230VAC 50/60Hz
Light Source	8W High Output 6000K LED
Battery	YUASA 12V 9.0Ah Lead Acid
Emergency Inverter	Emcon 12VDC Emergency Inverter
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit (Self-Test & DALI options also available)
Ingress Protection	IP65
Finish	Grey
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives