

Product Description

- 1W LED emergency exit sign
- 2x1W LED emergency adjustable tiller
- LiFePO4 battery technology
- Surface mounting installation
- Acrylic clear pictogram
- Powder coated die-cast aluminium housing


Product Image



Specification

- 3 hour rated duration
- 26 metre viewing distance
- Exit sign – maintained operation
- 2no. adjustable spotlights – non-maintained operation
- Tridonic LiFePO4 battery technology
- Tridonic electronic components
- Surface wall mounting
- IP20 ingress protection
- RAL 9003 White as standard
- Custom RAL colour available on request

Product Dimensions

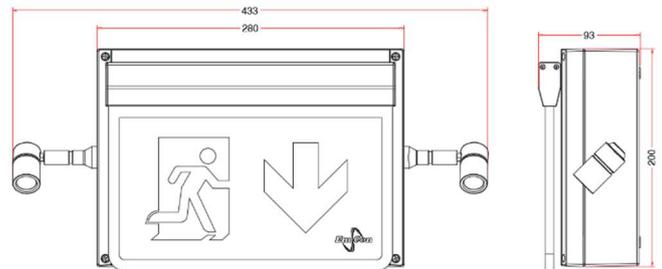

Technical Data

Mode of Operation	Exit Sign (Maintained) Adjustable Tiller (Non-Maintained)
Supply Voltage	230VAC 50/60Hz
Exit Sign Light Source	TRIDONIC 1W High Output 6500K LED Strip
Exit Sign Battery	TRIDONIC 3.2V 3.0Ah 2-Cell LiFePO4
Exit Sign Emergency Inverter	TRIDONIC EM powerLED FX LiFePO4 1 – 2 W
Adjustable Spotlight Light Source	1W CREE High Output 4000K LED COB
Adjustable Spotlight Battery	TRIDONIC 3.2V 4.5Ah 3-Cell LiFePO4
Adjustable Spotlight Emergency Inverter	TRIDONIC EM powerLED FX LiFePO4 1 – 2 W
Re-Charge Period	24 hours from full discharge
Emergency Duration	3 hours
Test Facility	Central Test Unit (Self-Test & DALI options also available)
Viewing Distance	26 Metres
Ingress Protection	IP20
Finish	RAL 9003 as standard (other colours available on request)
Compliance	I.S./E.N. 60598-1, I.S./E.N. 60598-2-22, the LVD, the EMC, the ERP, the RoHS, the WEEE and the Battery European Directives